



The Wood Component Company

Microshades Treated Softwood Decking Range



Grade:	Saw falling Swedish Whitewood
Moisture Content:	16-18% Air Dried after Treatment
Thickness:	32mm
Width:	144mm
Lengths:	3m up to 5.4m
Certification:	100% PEFC Certified

32mm








144mm



The Wood Component Company

Microshades Treated Softwood Decking Range

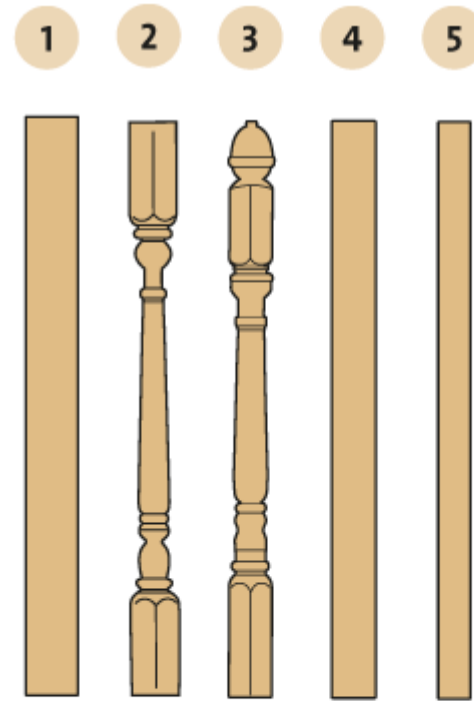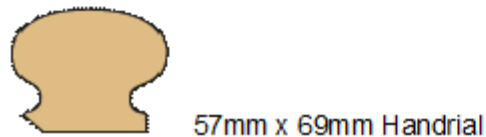

1 Eased Edge Spindle (41mm x 41mm x 900mm)

2 Decorative Spindle (41mm x 41mm x 900mm)

3 Newel Posts (94mm x 94mm x 1500mm)

4 Eased Edge Posts (94mm x 94mm x 1.8m/2.4m/3m)

5 Eased Edge Posts (69mm x 69mm x 1.8m/2.4m/3m)